

DS-2CE5682P(N)-IT1

600 TVL DIS EXIR Dome Camera




EXIR



Key features

- 1/3" DIS
- EXIR Technology
- True Day/Night
- 600 TVL Horizontal Resolution
- 20m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

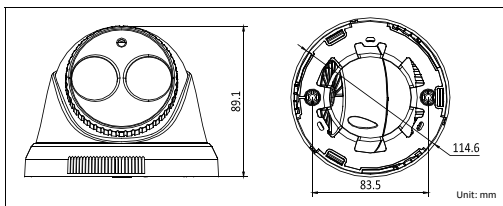

DS-2CE5682P(N)-IT1	
Camera	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	720(H)×480(V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	3.6mm (2.8mm,6mm,8mm optional) Angle of view: 68.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	600 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
BLC	On
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 5 W
Ingress Protection	IP66
IR Range	20 meters
Dimensions	Φ114.6× 89.1mm(Φ4.5" × 3.5")
Weight	300 g (0.66 lbs)

Available models

PAL: DS-2CE5682P-IT1
NTSC: DS-2CE5682N-IT1

Accessories



DS-1258ZJ
(wall mount)